



淄博莱宝电力电容器有限公司

常规电容器型号技术参数及安装尺寸图


规格型号	额定容量 kVAR	额定电 容 μ F	额定 电流 A	额定 频率 Hz	外形结构	接线端子 D	壳体高度 H
0.4-10-3	10	199.0	14.4	50/60	①	M6	130
0.4-15-3	15	298.6	21.7	50/60	①	M6	200
0.4-20-3	20	398.1	28.9	50/60	①	M6	220
0.4-25-3	25	497.6	36.1	50/60	②	M8	220
0.4-30-3	30	597.1	43.3	50/60	②	M8	220
0.4-40-3	40	796.2	57.7	50/60	③	M10	280
0.4-50-3	50	995.2	72.2	50/60	③	M10	300
0.45-5-3	5	78.6	6.4	50/60	①	M6	120
0.45-10-3	10	157.2	12.8	50/60	①	M6	120
0.45-15-3	15	235.9	19.3	50/60	①	M6	180
0.45-20-3	20	314.5	25.7	50/60	①	M6	200
0.45-25-3	25	393.2	32.1	50/60	①	M6	220
0.45-30-3	30	471.8	38.5	50/60	②	M8	220
0.45-40-3	40	629.1	51.3	50/60	②	M8	230
0.45-45-3	45	707.7	57.7	50/60	③	M10	280
0.45-50-3	50	786.4	64.2	50/60	③	M10	280
0.45-60-3	60	943.6	77.0	50/60	③	M10	300
0.48-5-3	5	69.1	6.0	50/60	①	M6	120
0.48-10-3	10	138.2	12.0	50/60	①	M6	130
0.48-15-3	15	207.3	18.0	50/60	①	M6	200
0.48-20-3	20	276.5	24.1	50/60	①	M6	220
0.48-25-3	25	345.6	30.1	50/60	②	M8	220
0.48-30-3	30	414.6	36.1	50/60	②	M8	220
0.48-40-3	40	552.9	48.1	50/60	②	M8	270
0.48-45-3	45	622.0	54.1	50/60	③	M10	280
0.48-50-3	50	691.1	60.1	50/60	③	M10	300
0.48-60-3	60	829.4	72.2	50/60	④	M12	220
0.48-80-3	80	1105.8	96.2	50/60	④	M12	280
0.525-10-3	10	115.6	11.0	50/60	①	M6	130
0.525-15-3	15	173.3	16.5	50/60	①	M6	200
0.525-20-3	20	231.1	22.0	50/60	①	M6	200
0.525-25-3	25	288.9	27.5	50/60	②	M8	220
0.525-30-3	30	346.6	33.0	50/60	②	M8	220
0.525-40-3	40	462.2	44.0	50/60	②	M8	270
0.525-50-3	50	577.7	55.0	50/60	③	M10	330
0.525-60-3	60	693.3	66.0	50/60	④	M12	240

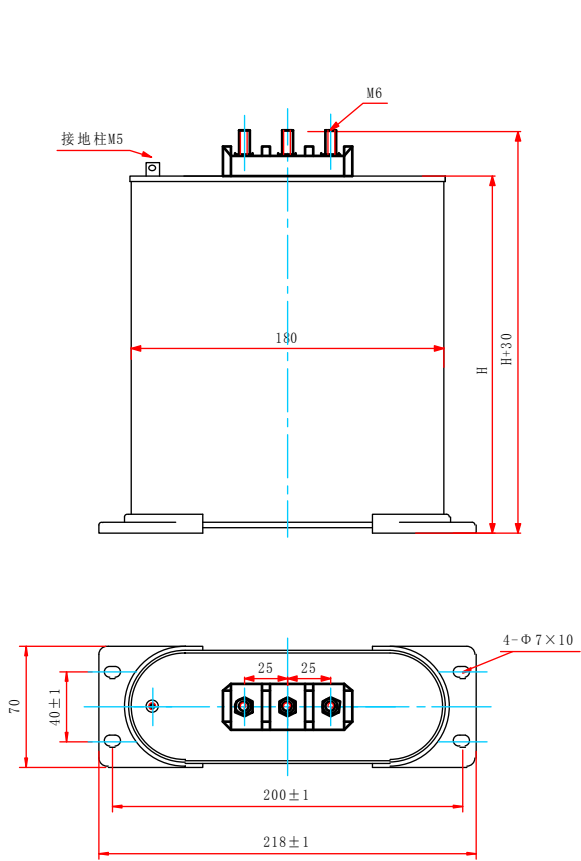


图型1

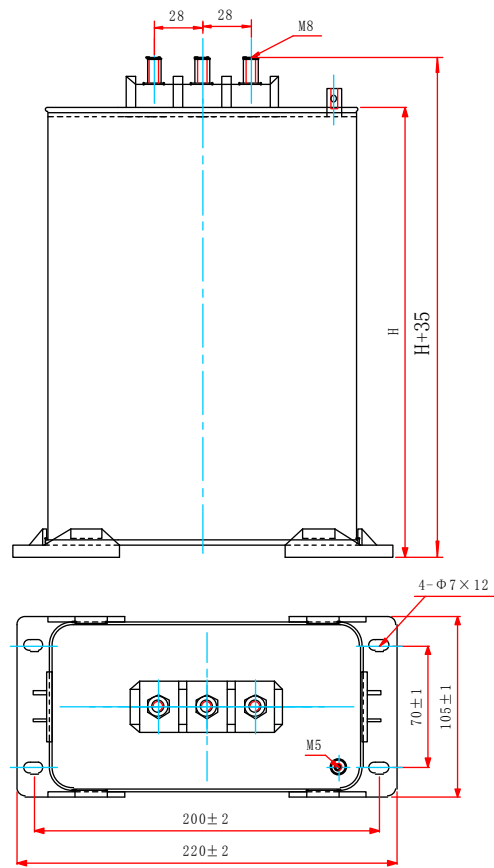

图型2

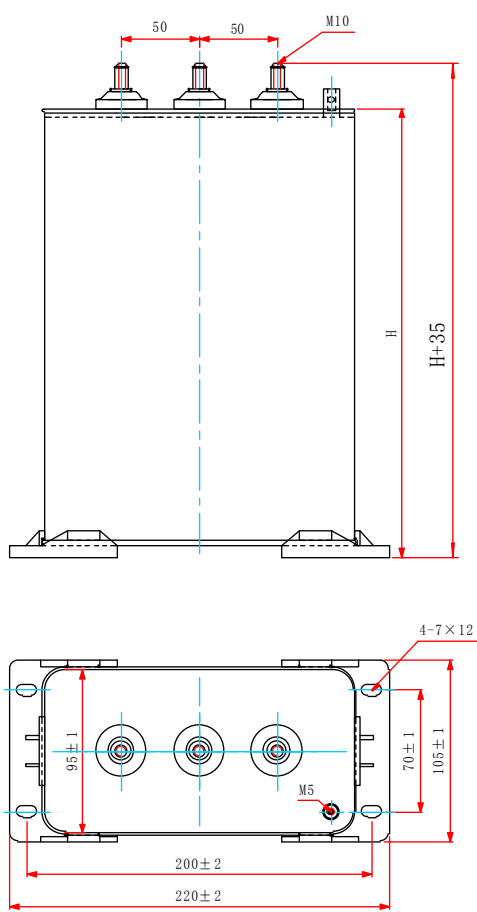

图型3

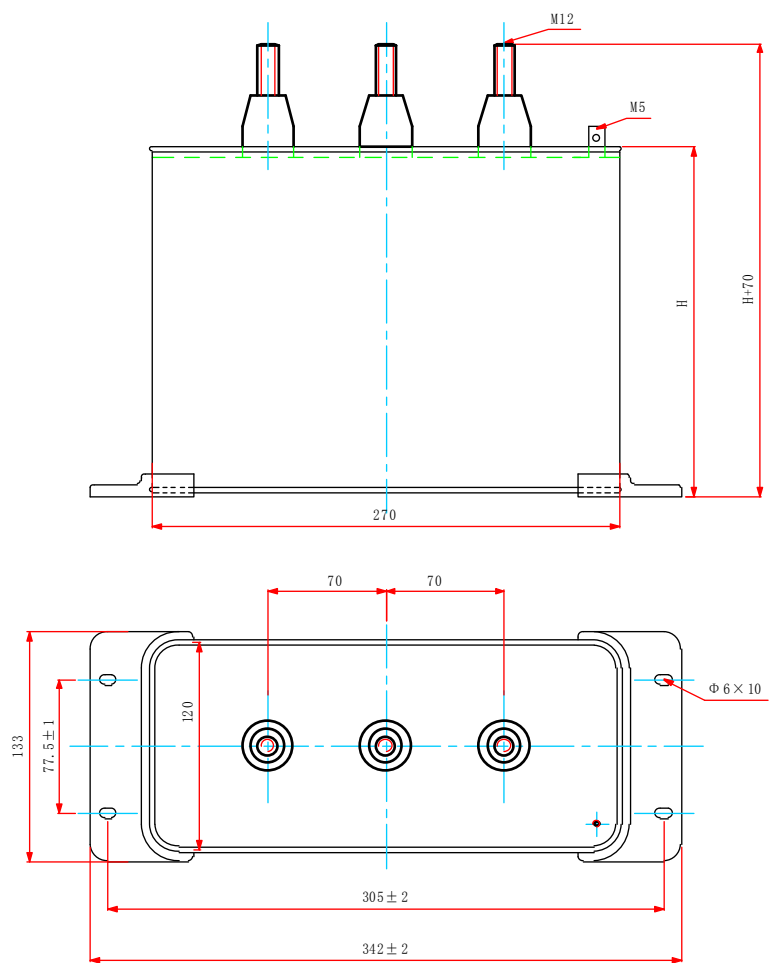

图型4